


# ZeeWeed\* 500D module

Module Dimensions			
Product	Width (A) mm (in)	Height (B) mm (in)	Depth (C) mm (in)
370, 340	844 (33.2)	2,198	49 (1.9)
440		(86.5)	52 (2.05)
300s		1,835	49 (1.9)
350s		(72.25)	52 (2.05)

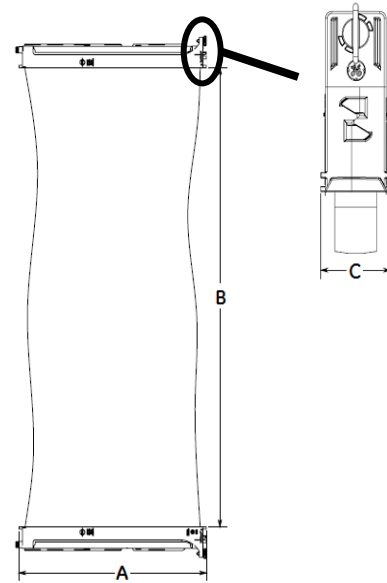

Module Properties									
Application	Product	Nominal Membrane Surface Area m <sup>2</sup> (ft <sup>2</sup> )	Max. Shipping Weight <sup>1</sup> kg (lb)	Lifting Weight <sup>2</sup> kg (lb)	Material	Nominal Pore Size (µm)	Surface Properties	Fiber Diameter (mm)	Flow Path
MBR	370	34.4 (370)	28 (61)	28 - 75 (61 - 164)	PVDF	0.04	Non-ionic & Hydrophilic	OD: 1.9 ID: 0.8	Outside-In
	300s	27.9 (300)	24 (53)	24 - 58 (53 - 128)					
Non-MBR	440	40.9 (440)	32 (70)	30 - 74 (66 - 163)					
	350s	32.5 (350)	26 (57)	26 - 72 (57 - 159)					
All	340	31.6 (340)	26 (61)	26 - 60 (57 - 132)					

<sup>1</sup> Packaged

<sup>2</sup> Varies with solids accumulation

Operating & Cleaning Specifications							
Application	Product	TMP Range kPa (psig)	Max. Operating Temp. °C (°F)	Operating pH Range	Max. Cleaning Temp. °C (°F)	Cleaning pH Range	Max. Cl <sub>2</sub> Conc'n (ppm)
MBR	370, 300s	-55 to 55 [-8 to 8]	40 (104)	5.0-9.5	40 (104)	2.0 - 10.5 (<30°C) 2.0 -10.0 (30-40°C)	1,000
Non-MBR	440, 340, 350s	-90 to 90 [-13 to 13]					

Find a contact near you by visiting [www.suezwatertechnologies.com](http://www.suezwatertechnologies.com) and clicking on "Contact Us."

\*Trademark of SUEZ; may be registered in one or more countries.

©2019 SUEZ. All rights reserved.