


ZeeWeed* 500D Module

Module Dimensions				
Application	Product	Width (A) mm (in)	Header-to-Header Length (B) mm (in)	Depth (C) mm (in)
MBR	500D	844 (33.2)	1,940 (76.4)	49 (1.9)
Water	500D			52 (2.1)
	500Ds		1,577 (62.1)	52 (2.1)

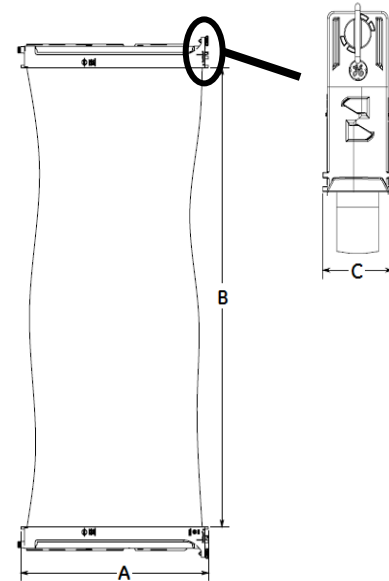

Module Properties									
Application	Membrane Surface Area m ² (ft ²)	Max. Shipping Weight ¹ kg (lb)	Lifting Weight ² kg (lb)	Material	Nominal Pore Size (µm)	Fibre Diameter (mm)	Surface Properties	Fibre Tensile Strength (N)	Flow Path
MBR	40.0 (430)	28 (61)	28 – 75 (61 – 164)	PVDF	0.04	2.2	Non-ionic & Hydrophilic	> 600	Outside-In
Water	40.9 (440)	32 (70)	30 – 74 (66 – 163)			1.9			
	32.5 (350)	26 (57)	26 – 72 (57 – 159)			1.9			

¹ Packaged

² Varies with solids accumulation

Operating & Cleaning Specifications						
Application	TMP Range kPa (psig)	Max. Operating Temp. °C (°F)	Operating pH Range	Max. Cleaning Temp. °C (°F)	Cleaning pH Range	Max. Cl ₂ Conc'n (ppm)
MBR	-55 to 55 (-8 to 8)	40 (104)	5.0-9.5	40 (104)	2.0 – 10.5 (<30°C)	1,000
Water	-90 to 90 (-13 to 13)				2.0 -10.0 (30-40°C)	

Find a contact near you by visiting www.suezwatertechnologies.com and clicking on "Contact Us."

*Trademark of SUEZ; may be registered in one or more countries.

©2020 SUEZ. All rights reserved.

FSpw500D-MOD_EN.doc Dec-20