

TECHNICAL SPECIFICATION SHEET

Features and Benefits

- High tensile strength
- Enhanced hydrophilicity
- Low fouling
- Consistent, high quality permeate
- Sharp rejection profile
- Long lifespan
- Small footprint



Membrane Specifications

Features	UOM	Specifications
Structure	-	Asymmetric
Base Material	-	Reinforced polyethersulfone (PES)
Outer Diameter	mm / inch	1.48 / 0.058
Inner Diameter	mm / inch	0.65 / 0.026
Molecular Weight Cut-Off (MWCO)	Daltons	120,000
Bacteria Rejection	%	> 99.9999
Tensile Force	N	11-12



Module Specifications

Features	UOM	Specifications
Dimensions (Overall Dia. x Length)	mm / inch	257.8 x 2,130 / 10.2 x 83.9
Membrane Area	m ² / ft ²	55 / 592
Feed Inlet	inch	1.5 NPT
Permeate Outlet	inch	1.5 NPT
Reject Outlet	inch	1.0 NPT
Dry Weight	kg / lbs	55 / 121
Wet Weight	kg / lbs	95 / 209
Housing	-	PVC
End Caps	-	PVC
Sealant	-	Proprietary composite potting materials

TECHNICAL SPECIFICATION SHEET

Operating Parameters & Limits	
Flow Type	Outside-In
Operating Temperature	5 – 40°C
Clean Water Flux @ 30°C	200 LMH / 118 GFD
Operating pH	2 – 10
Cleaning pH	2 – 11
Max. NaOCl - Cleaning (ppm)	500 ppm
Max. NaOCl - Continuous (ppm)	10 ppm
Operating TMP	0.2 – 1.5 bar
Max. Feed Pressure	2.5 bar
Max. Backwash TMP	2.0 bar
Max. Cleaning TMP	2.0 bar

Item	Description	Material
A	Cir-clip	PVC
B	Permeate end plate	PVC
C	Permeate end cap	PVC
D	Housing	PVC
E	Feed end plate	PVC

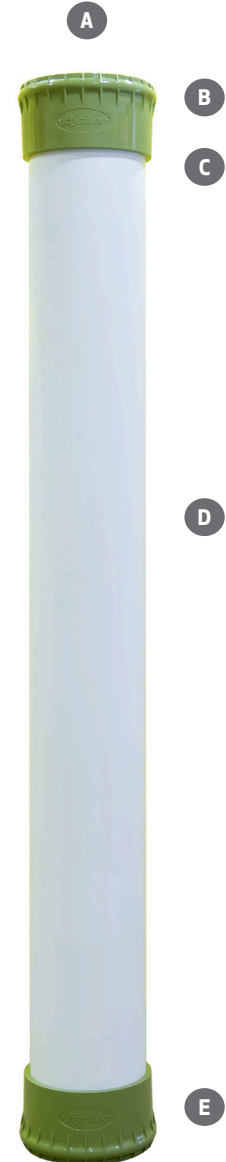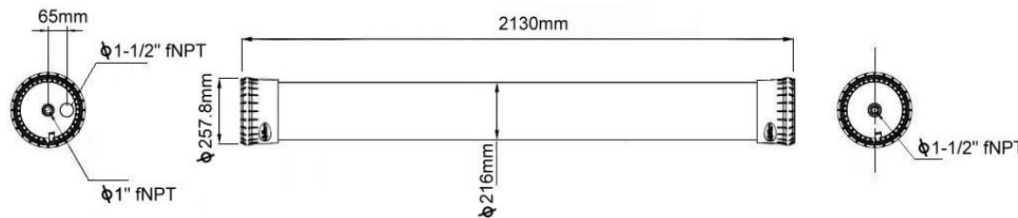

COPYRIGHT & TRADEMARK INFORMATION

All title, ownership rights and intellectual property rights in and relating to this written material or any copies thereof including but not limited to copyright, logos, names, trademarks, concept and themes are owned by Hyflux Ltd or used under authorised licence by Hyflux Ltd. Receipt of this written material confers no title or ownership in the contents of the written material. You may not, in whole or in part, copy, broadcast, communicate, photocopy, transmit, translate, modify, reproduce, create derivative works based on this written material, remove any proprietary notices or labels on the written material over the internet, without the prior written consent of Hyflux Ltd.

DISCLAIMER

The information contained in this publication is meant for general informational purpose only and is subject to change without notice. It is not to be construed as implying any warranty of any kind, whether of any kind, whether express or implied, including without limitation, warranties of accuracy of information, warranties of merchant indemnity, fitness for a particular purpose or warranty of performance. Hyflux Ltd hereby disclaims to the fullest extent allowable by law, all responsibility for loss, damage, injury, claim or liability of any kind arising from or in connection with (a) any errors or omission in the material including but not limited to technical inaccuracies and typographical errors; or (b) the reader's use of the publication.

Hyflux Membrane Manufacturing Pte Ltd

Hyflux Innovation Centre, 80 Bendemeer Road, Singapore 339949

Tel: +65 6214 0777 | Fax: +65 6214 1211

sales@hyfluxmembranes.com

www.hyfluxmembranes.com