




Product Data Sheet
PVDF Out-In UF Module



DuPont™ IntegraTec™ L10N

L10N MODULE SPECIFICATIONS

Parameter	Details
Part Numbers	Single Module Pack (includes 4 fitted EPDM O-Rings and 7 gm Food Grade Silicone Grease Sachet): SAP: 00012038343 Legacy: W3T310440-120406
Module Operating Process	Pressurized Ultrafiltration
Typical Applications	General Applications
Membrane Type	Hollow Fiber
Filtration Flow Direction	Outside to Inside
Backwash Type	Air Scour with Liquid Backwash
Membrane Material	PVDF (Polyvinylidene Fluoride)
Other Wetted Module Components	Polyurethane, Polyethylene, Polyamide, EPDM
Nominal Membrane Pore Size	0.04 µm
Nominal Membrane Area	21.1 m ² / 227 ft ²
Nominal Module Length (Overall)	1157 mm / 45.5 in
Nominal Module Diameter (Overall)	119 mm / 4.7 in
Approximate Module Mass	7.5 kg / 16 lb
Potable Water Certification ^{Note i}	NSF/ANSI/CAN 61 Drinking Water System Components – Health Effects

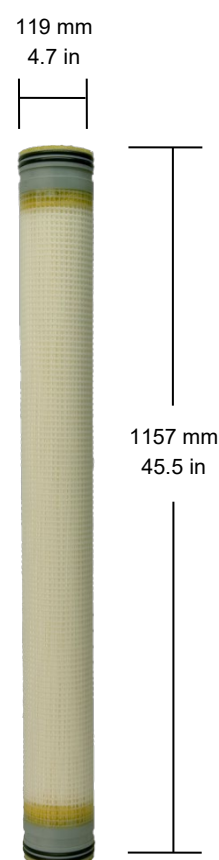

Powered by

MEMCOR®
a DuPont brand

L10N MODULE OPERATING SPECIFICATIONS

Parameter	Details
Operating Temperature Range	> 0 to 40 °C / > 32 to 104 °F (Must not be exposed to freezing conditions)
Temperature Range for Transportation and Storage	Preferred range 5 to 25 °C / 41 to 77 °F Allowable range > 0 to 40 °C / > 32 to 104 °F (shipment/storage in a temperature controlled container (or reefer) at 20 °C / 68 °F recommended). Modules must not be exposed to freezing conditions and must remain moist at all times.
Typical Feed pH Range	6.0 – 9.0 pH ^{Note ii}
Allowable pH Range for Cleaning	2.0 – 10.5 pH typical ^{Note iii}
Typical Maximum Recommended Trans-Membrane Pressure (TMP) in Filtration (Pressurized Systems)	140 kPa / 20 psi ^{Note iv}
Maximum Allowable TMP at any time	± 150 kPa / ± 22 psi
Typical chlorine concentration during cleaning (MW or CIP)	50 – 200 mg/L @ 25 °C / 50 – 200 ppm @ 77 °F ^{Note v}
Maximum chlorine concentration during cleaning	1000 mg/L @ 25 °C / 1000 ppm @ 77 °F ^{Note v}
Maximum exposure to chlorine in feed or during storage	< 1 mg/L average, < 5 mg/L maximum, pH > 6.0 < 1 ppm average, < 5 ppm maximum, pH > 6.0 ^{Note v}
Maximum total chlorine exposure	1,000,000 mg.h/L @ 25 °C / 1,000,000 ppm.h @ 77 °F ^{Note v}
Maximum exposure to chloramines in feed or during storage	< 2.5 mg/L average, < 5 mg/L maximum, pH > 6.5 < 2.5 ppm average, < 5 ppm maximum, pH > 6.5 500,000 mg.h/L / 500,000 ppm.h ^{Note v}

Notes:

- i. NSF refers to NSF International formerly known as the National Sanitation Foundation. ANSI is a trademark of the American National Standards Institute.
- ii. Exposure to chloramines is not recommended in feeds below 6.5 pH.
- iii. Initial flushing of new modules followed by a cleaning cycle is recommended prior to use. Please refer to MEMCOR technical bulletin "Guidelines for flushing new MEMCOR® 'N' Series Modules" for further details.
- iv. Maximum recommended filtration TMP for a particular application is usually feed dependent. The actual recommended value may vary from that shown.
- v. Please consult DuPont Water Solutions for additional guidance on exposure limits and for operation at different temperatures.



Have a question? Contact us at:
www.dupont.com/water/contact-us

All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred.
 © 2023 DuPont. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours Inc., unless otherwise noted.